



Unmatched Quality Tiles

# Mosaic

Collection


8" x 12"

200mm x 300mm



Unmatched Quality Tiles




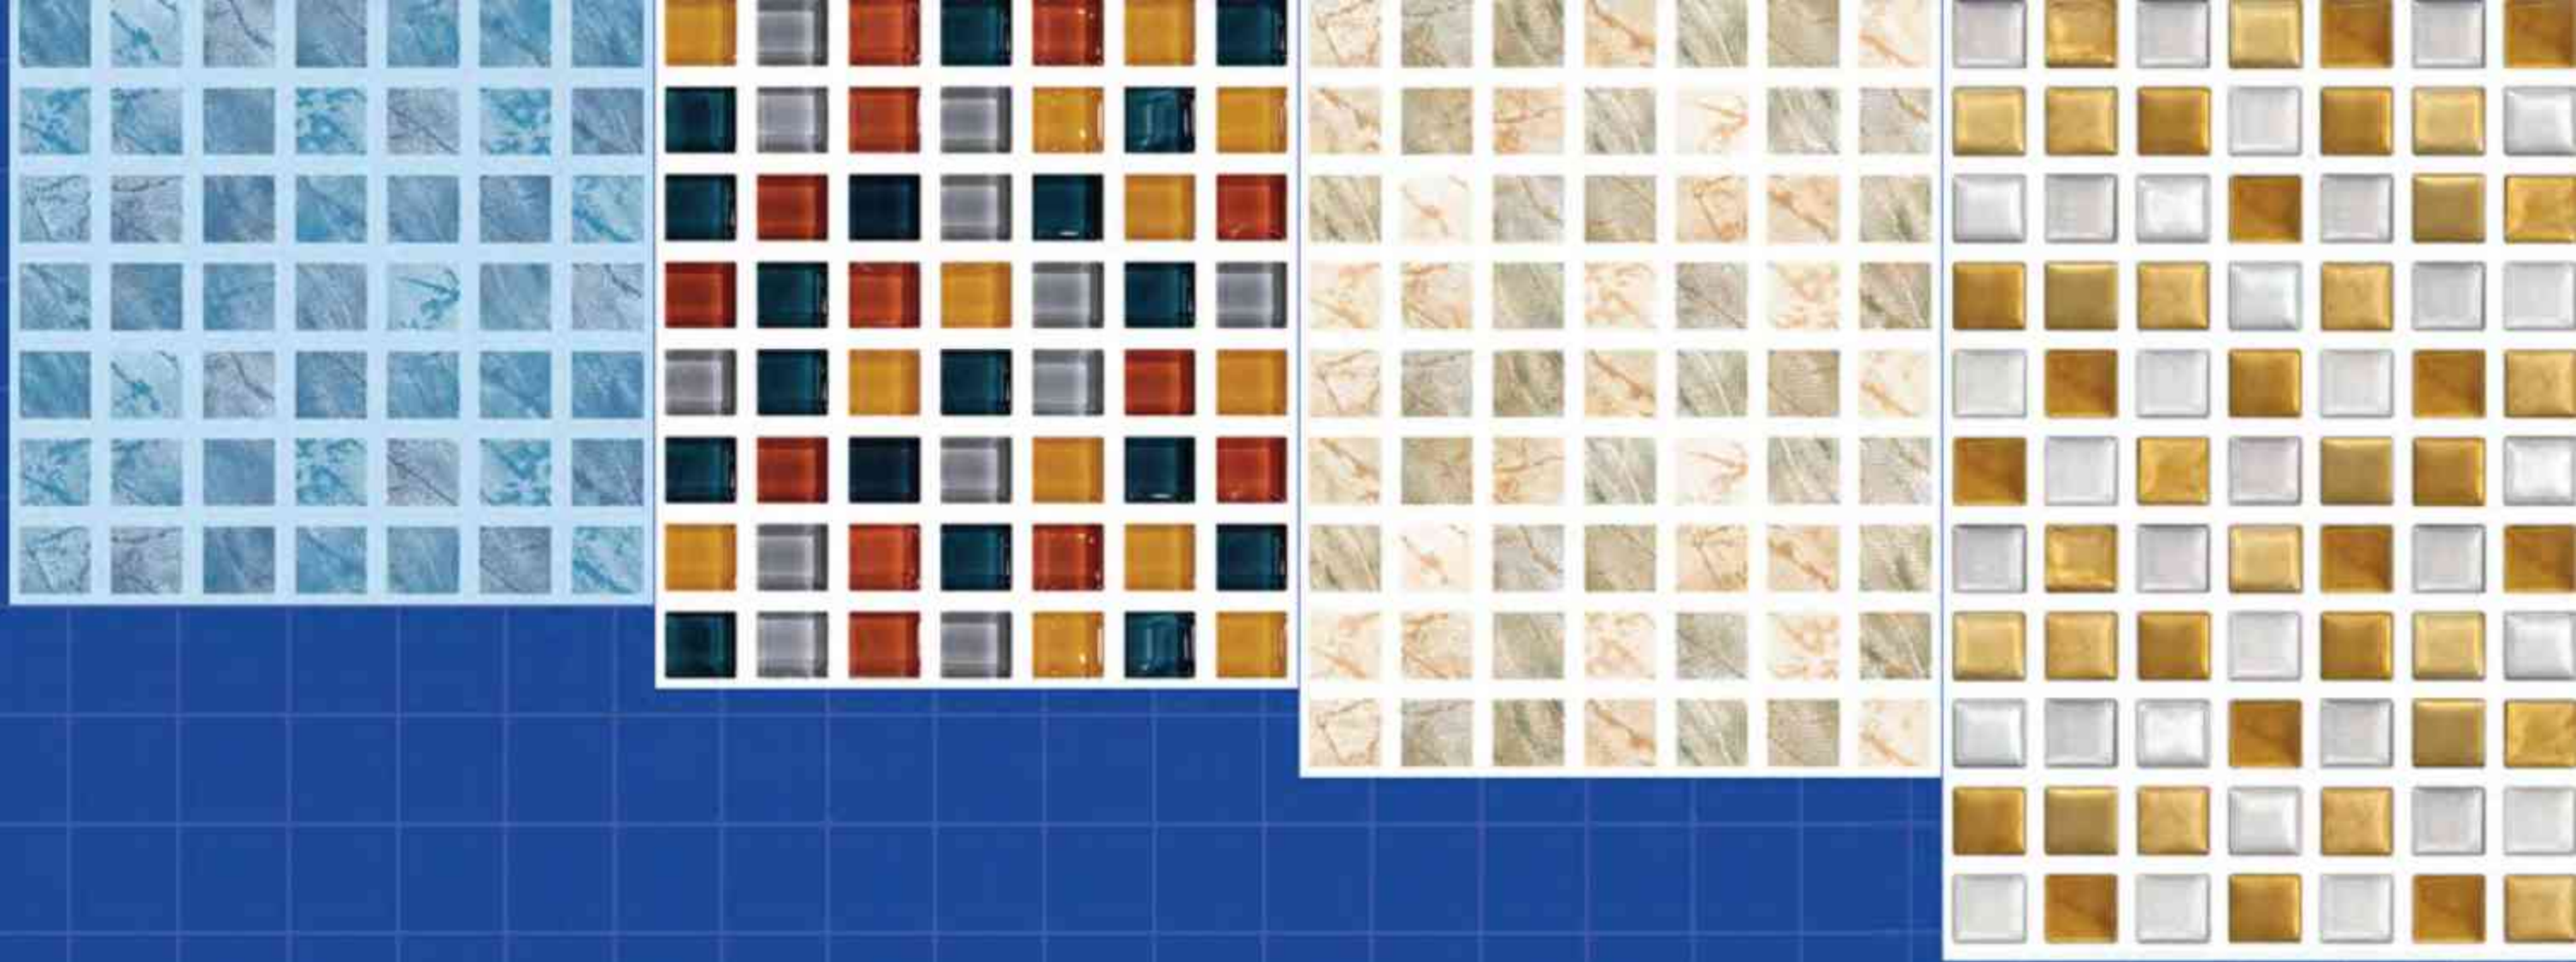

# “Stile Mosaic Collection


With the look & feel of glass tiles, Mosaic Collection is a series of vibrant glossy ceramic tiles with square mosaic pattern. Each design, with its unique colour palette and calming hues, creates a timeless look by adding colour, life, and personality to your living spaces.

”

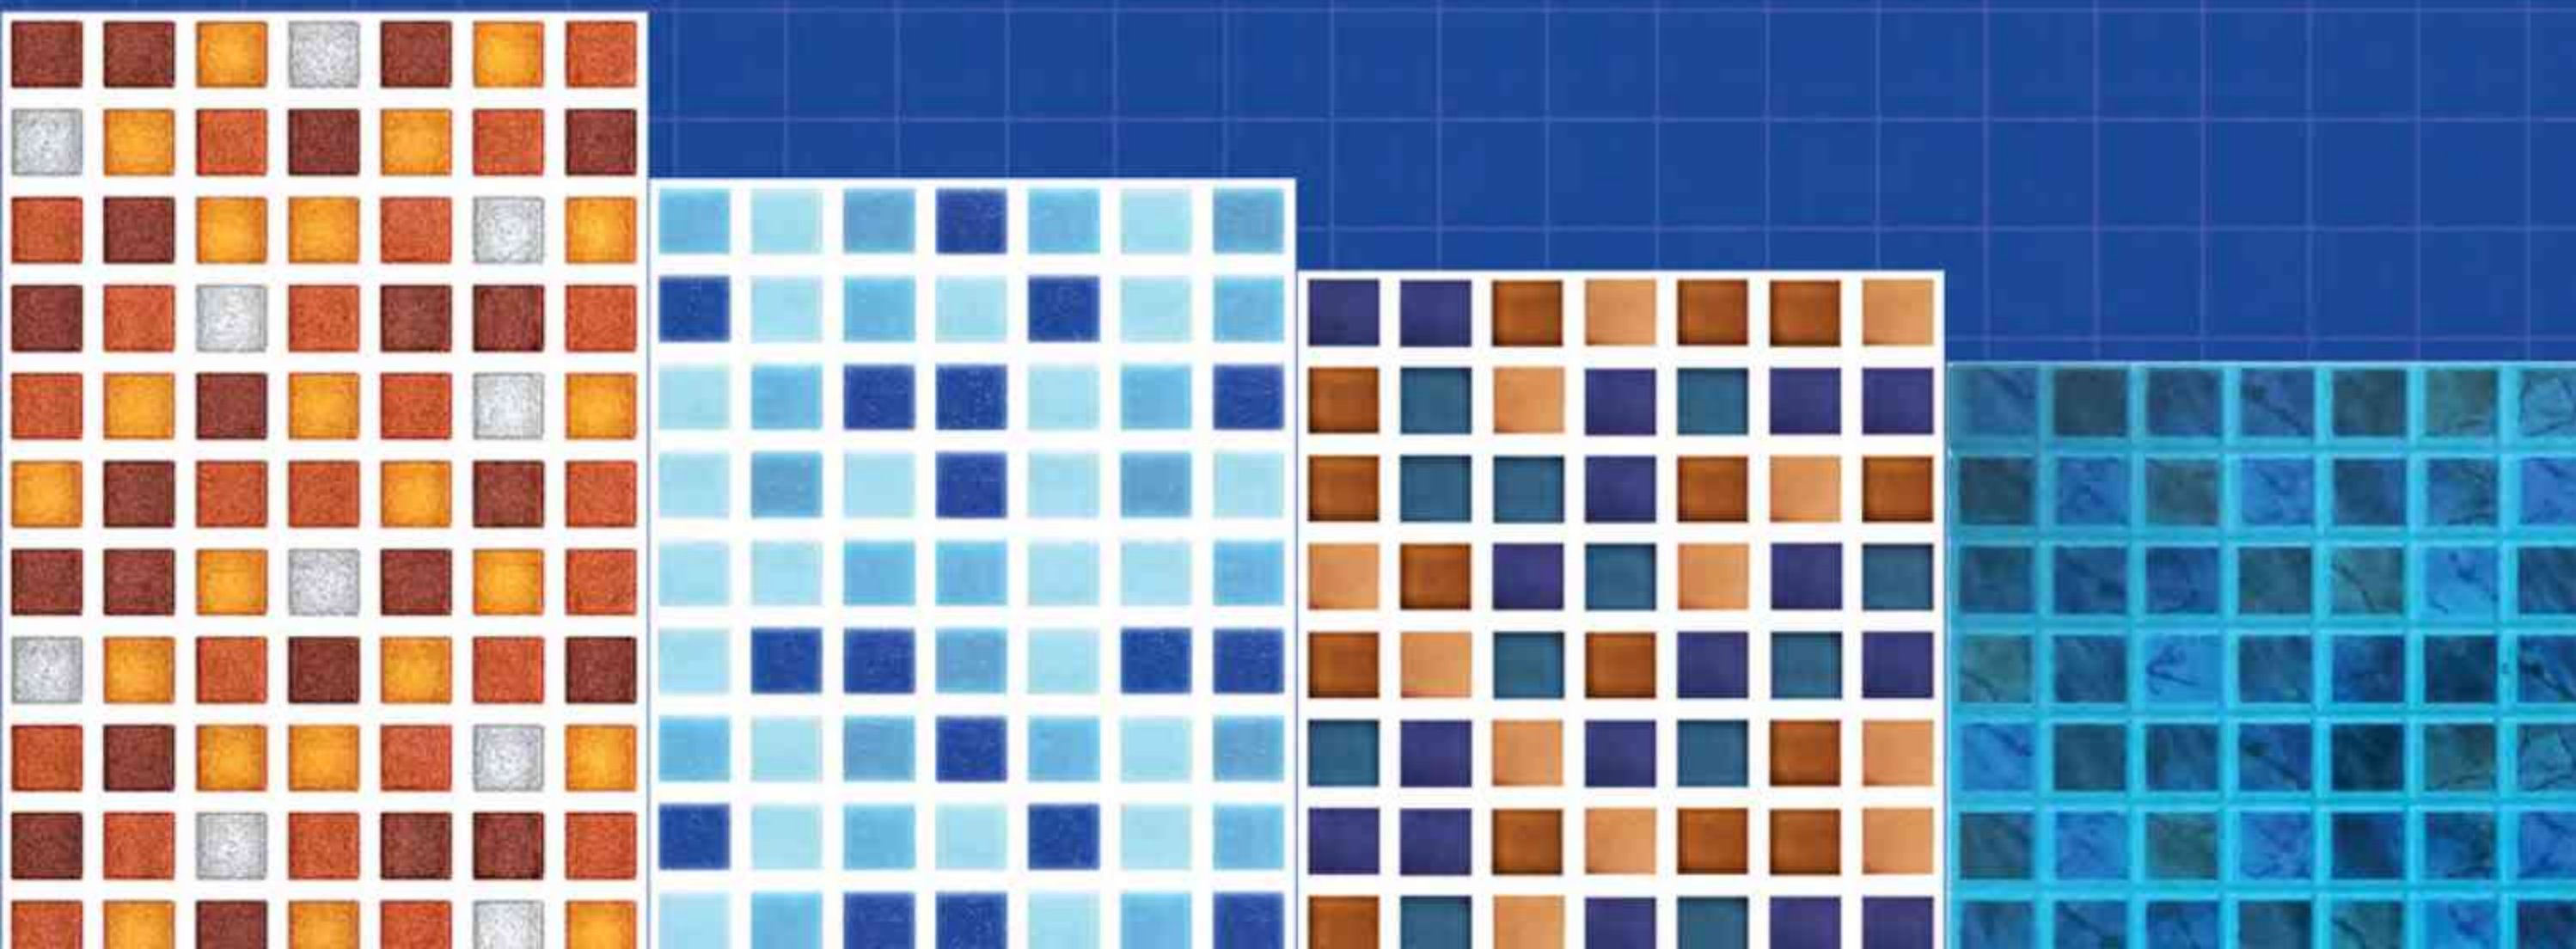



Unmatched Quality Tiles

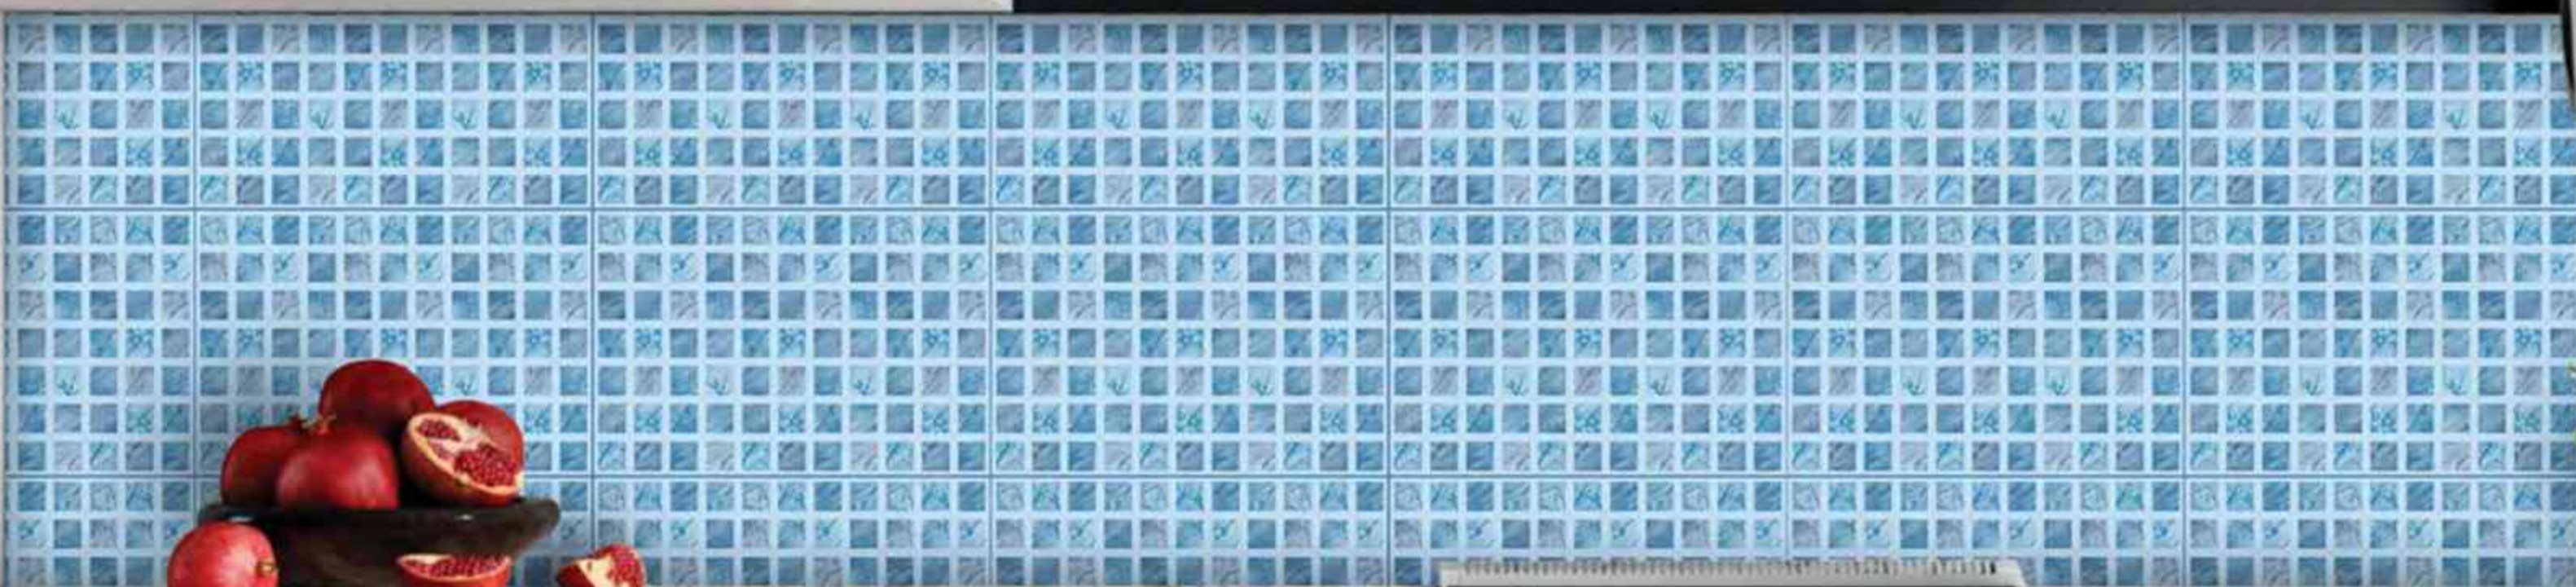

## Why Stile Mosaic Collection?

With this range, Stile offers you a classic alternative for glass tiles. Their exclusive sparkle and reflective nature will help in making your living space look bigger and brighter. When used as a backsplash in kitchen or bathrooms, they would be easy to wipe clean and will not absorb stains and odours.

**Size: 8x12 inches, 200mm x 300mm**

# Benefits Of Using Stile Mosaic Collection



Due to the glaze coating on Stile Ceramic tiles, they are resistant to stains and fading.



Due to their finish, Stile Ceramic tiles are hygienic, easily wipe clean and low maintenance.



Their glossy nature reflects the light and can make the space look larger.



They are resistant to household chemicals.



The installation of these tiles is ideal, easy and hassle-free.



Tile is double fired in kiln for hardening, hence, if installed correctly, these tiles can ensure durability for decades.

## Die Punch Wall Tiles:

These tiles are pressed from die punch to have a square mosaic punch design or texture on its upper surface.

## Glazed Glossy Ceramic:

A thin coat of liquified glass with a layer of glossy glaze is applied over the top surface of ceramic tile.

## Stile Recommends:


Using them on interior and exterior walls. They can be used on the backsplash areas of bathrooms and kitchens, bathroom flooring and feature walls. They can be used as border accents on low traffic areas of floor such as entryways or around the fixture & fittings of bedroom, living room and drawing room walls.

Also, in commercial spaces such as offices and restaurants, these could be used on reception walls or for backsplashes in kitchens, coffee corners and bathrooms to add hygiene and beauty to these spaces.

Although not recommended for use in swimming pools but owing to their irresistibly apt design, if you still want to use them in swimming pools then refer to the tile installation guideline at the end of this booklet.

**Note: Use these tiles with Stile Porcelain tiles.**



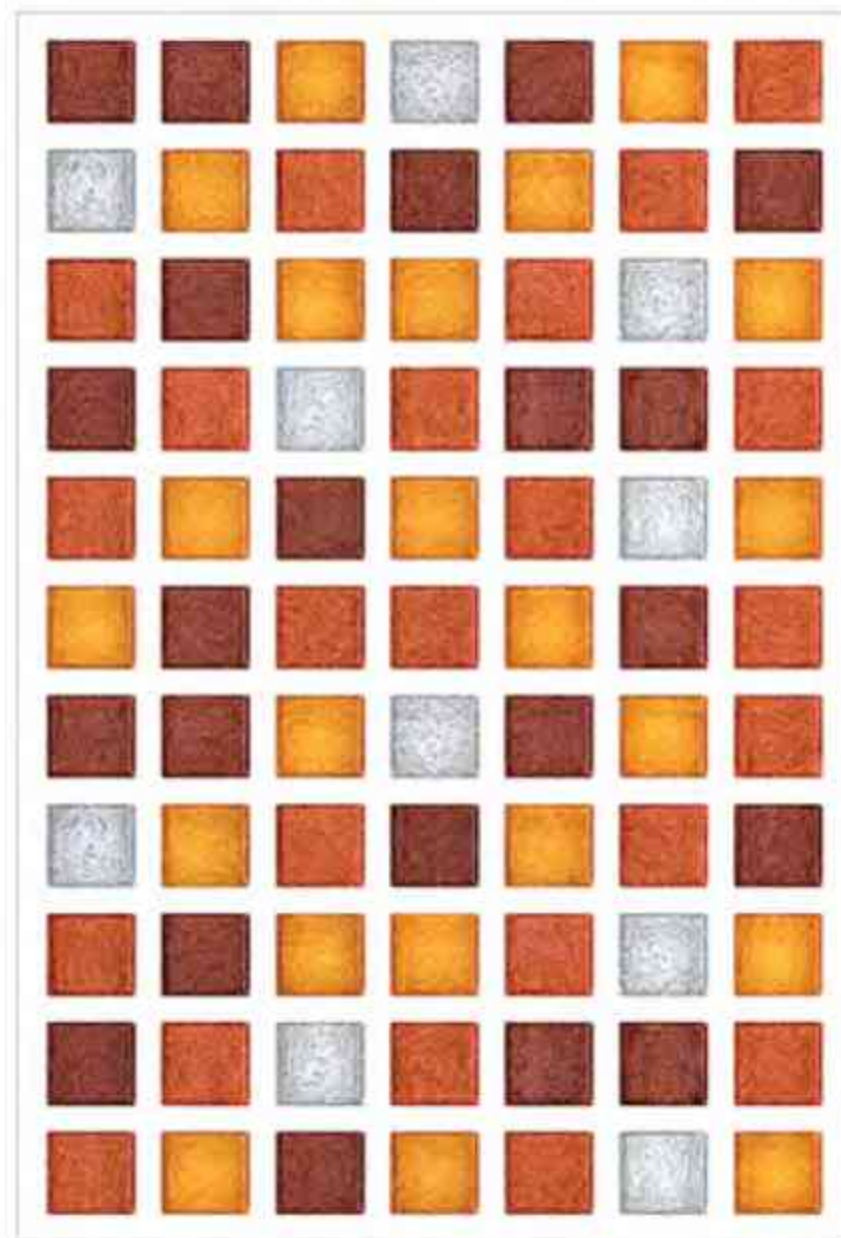


## **MOSAIC – AMBER**

**SURFACE FINISH I GLOSSY**

8X12 INCHES, 20X30 CM



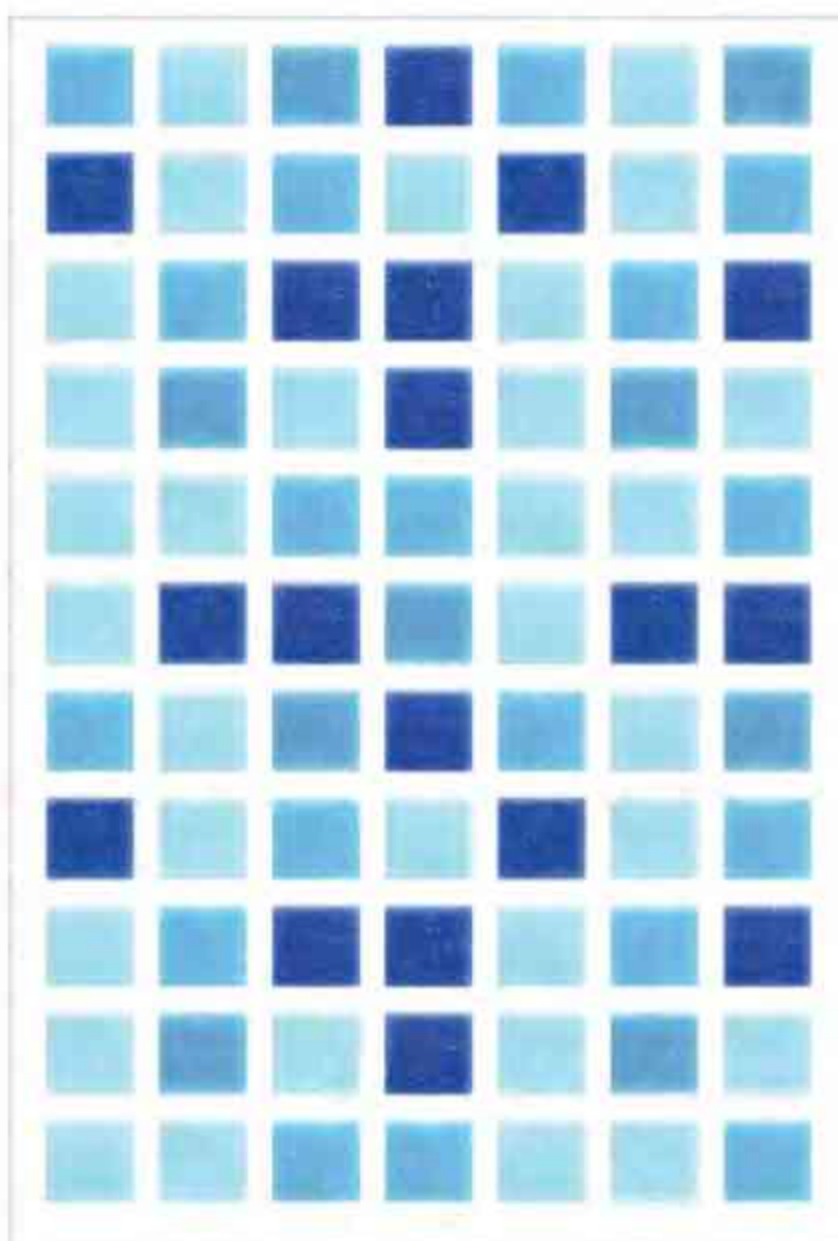

**MOSAIC – AQUAMARINE**  
**SURFACE FINISH | GLOSSY**

8X12 INCHES, 20X30 CM


**VISUAL ALSO INCLUDES:**



**GM – 017 | GREY**  
**SURFACE FINISH | MATT**

24X24 INCHES, 60X60 CM



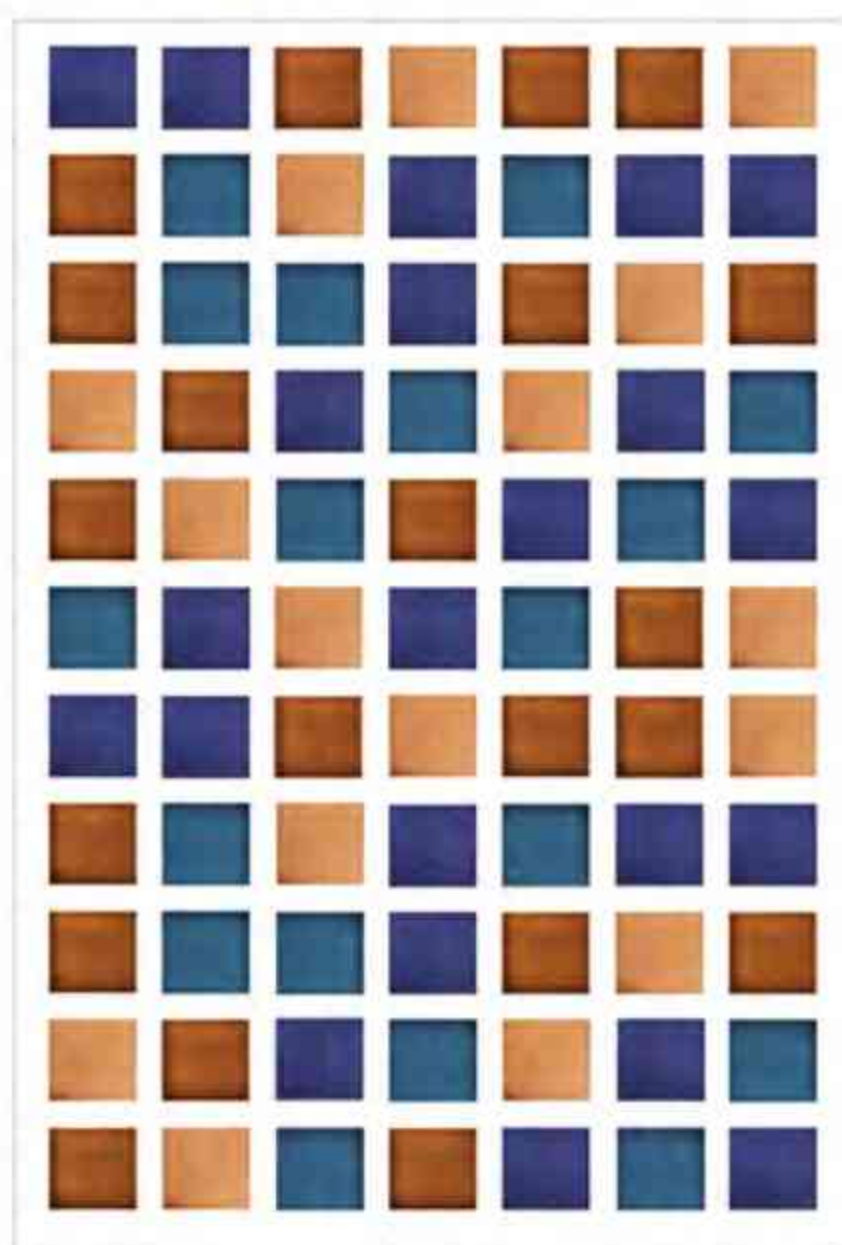

## **MOSAIC – CORAL**

**SURFACE FINISH | GLOSSY**

8X12 INCHES, 20X30 CM

### **VISUAL ALSO INCLUDES:**



## **WP-019 | DARK BROWN**


**SURFACE FINISH | MATT**

RANDOM, 6X37 INCHES, 14X92.5 CM  
VITRIFIED BODY





Unmatched Quality Tiles

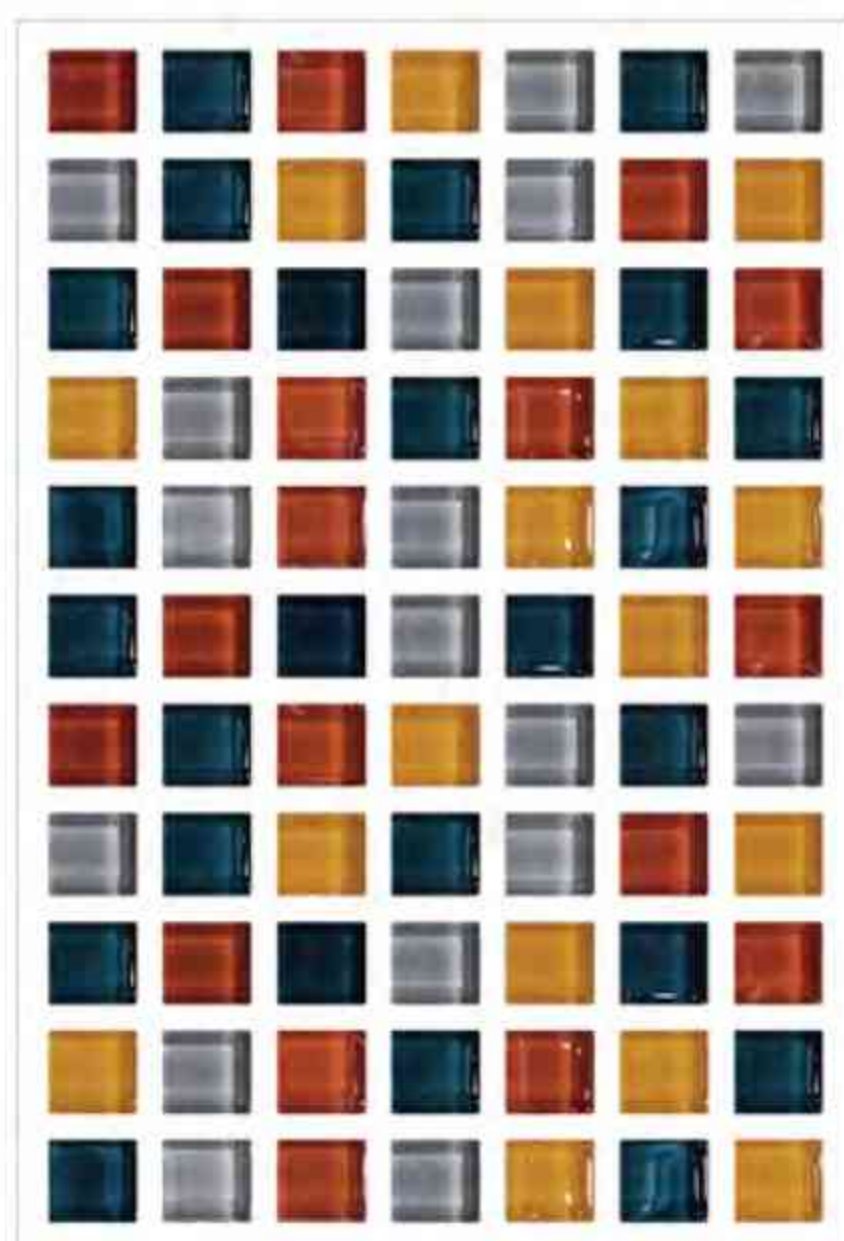


## **MOSAIC – JEWEL**

**SURFACE FINISH | GLOSSY**

8X12 INCHES, 20X30 CM



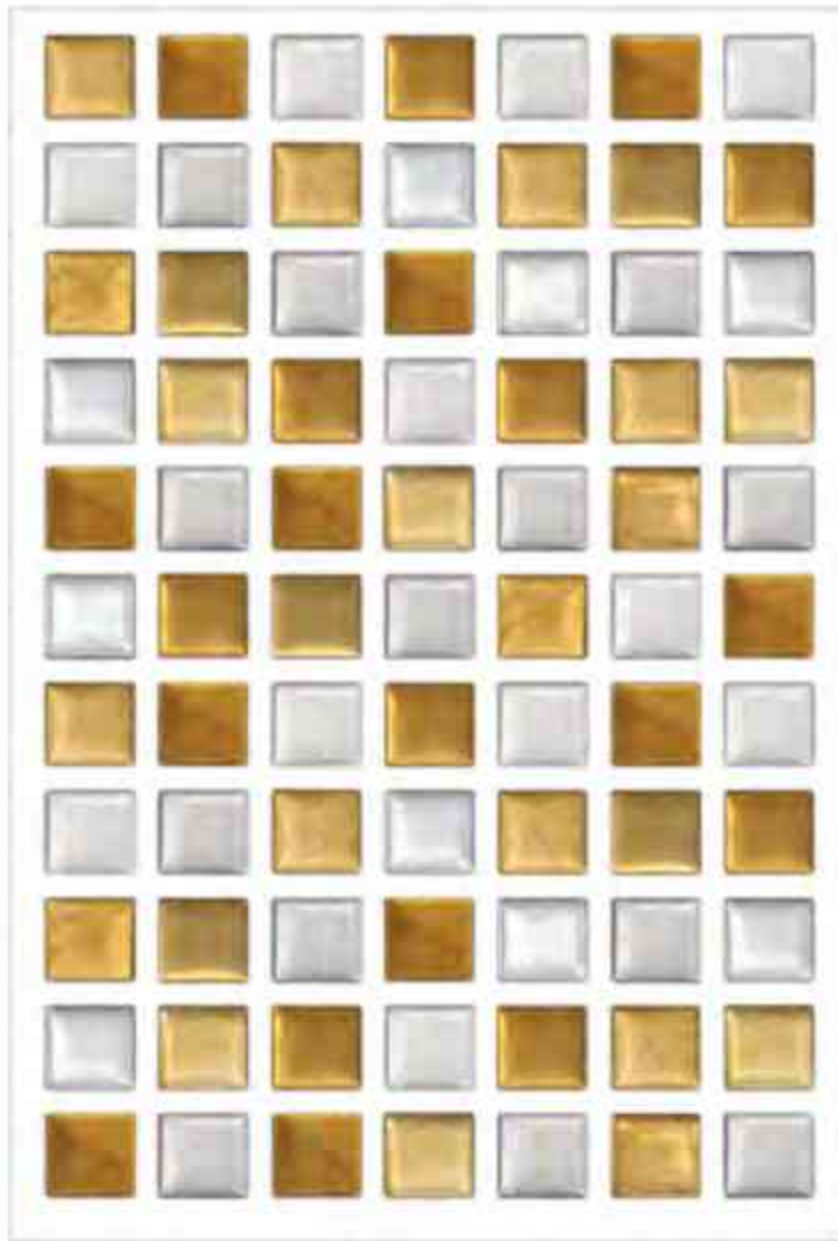

## **MOSAIC – ONYX**

**SURFACE FINISH | GLOSSY**

8X12 INCHES, 20X30 CM

### **VISUAL ALSO INCLUDES:**




## **ELT-GP-004 | GREY WHITE**

**SURFACE FINISH | GLOSSY**

RANDOM, 24X48 INCHES, 60X120 CM

FULL BODY GLAZE PORCELAIN



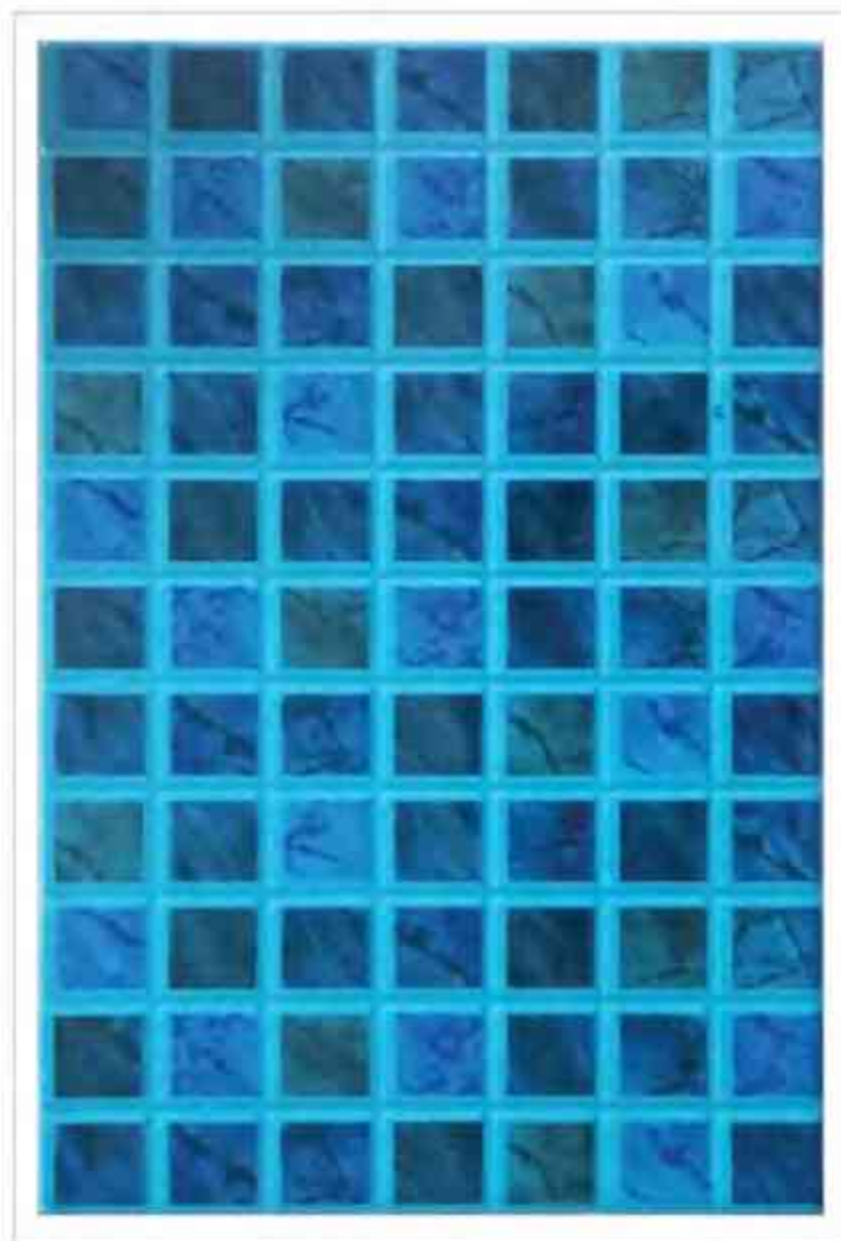


**MOSAIC – AZURE**  
**SURFACE FINISH I GLOSSY**  
8X12 INCHES, 20X30 CM






**MOSAIC – QUARTZ**  
**SURFACE FINISH I GLOSSY**  
8X12 INCHES, 20X30 CM



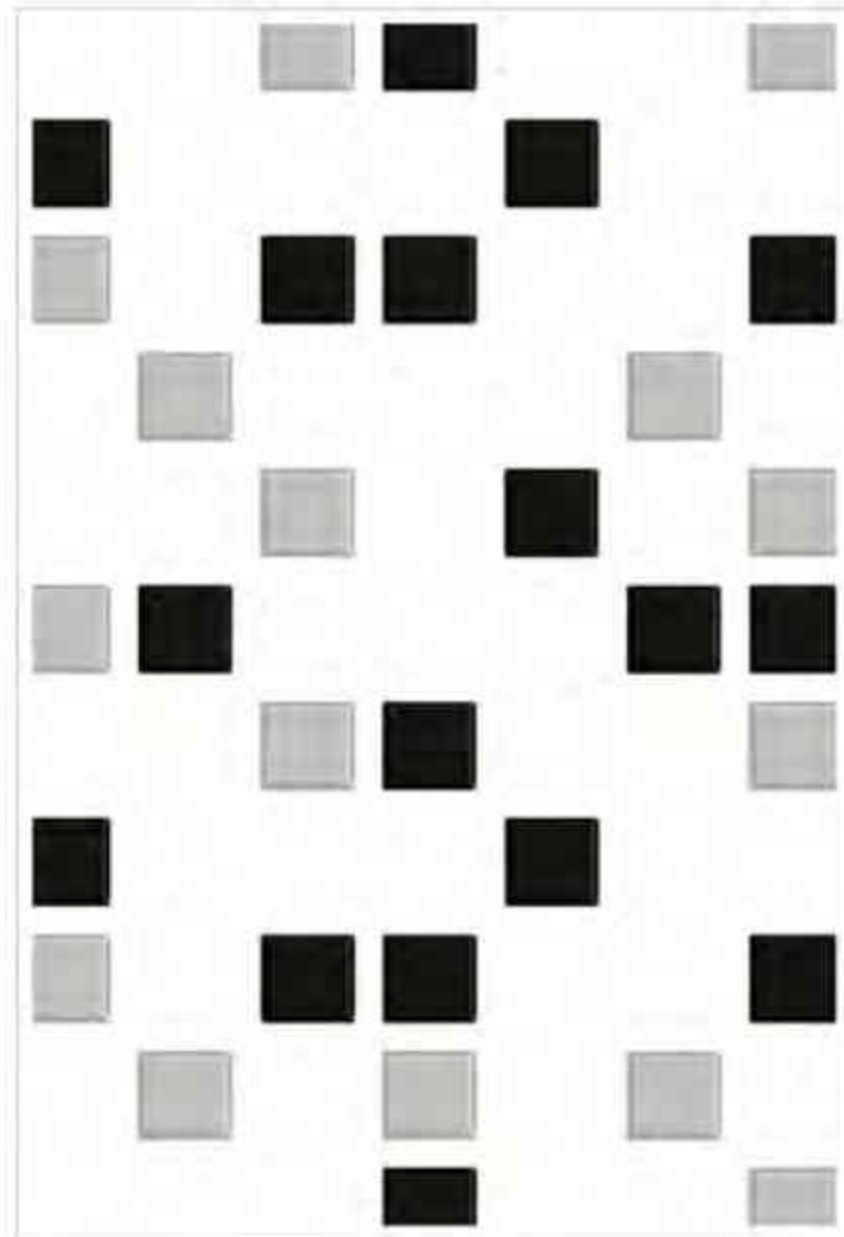


**MOSAIC – MOONSTONE**  
**SURFACE FINISH | GLOSSY**  
8X12 INCHES, 20X30 CM



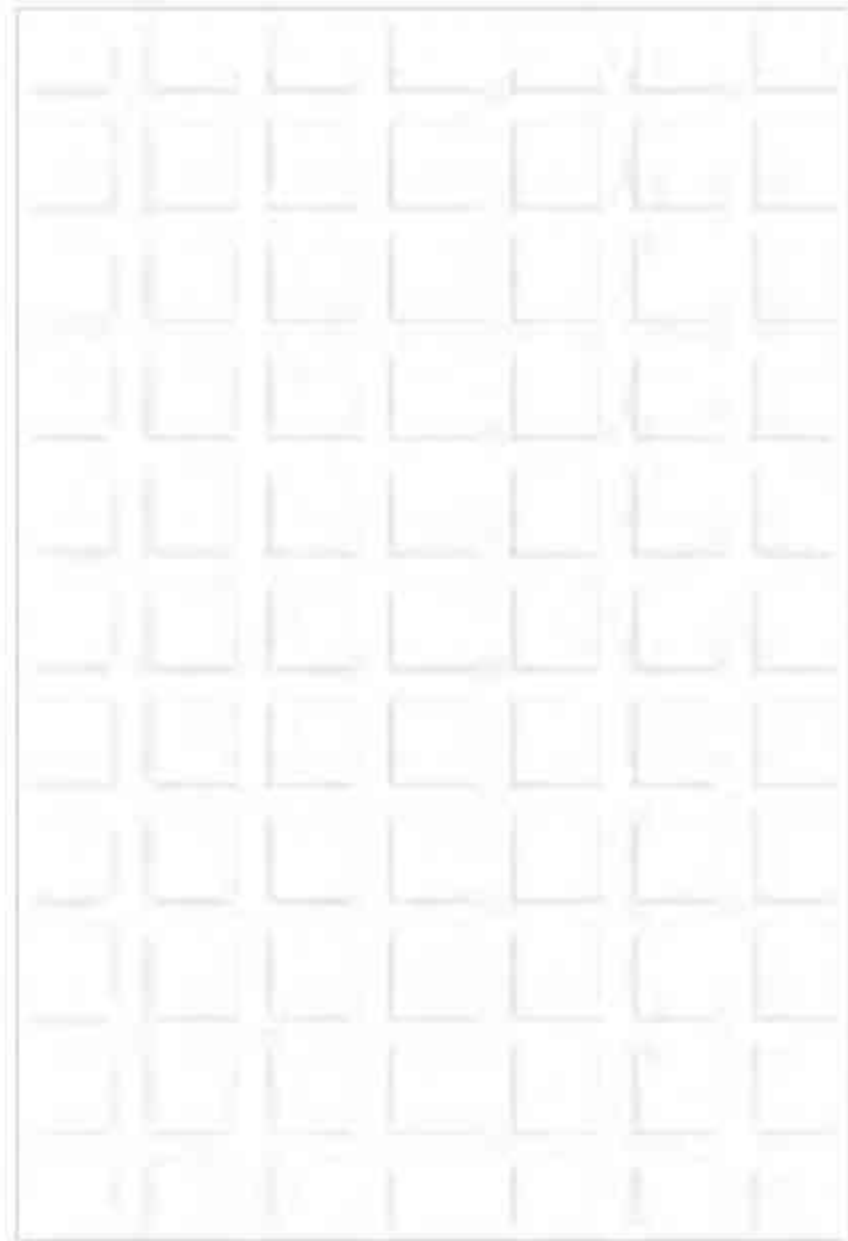

**MOSAIC – SOLID – PEARL WHITE**  
**SURFACE FINISH | GLOSSY**  
8X12 INCHES, 20X30 CM



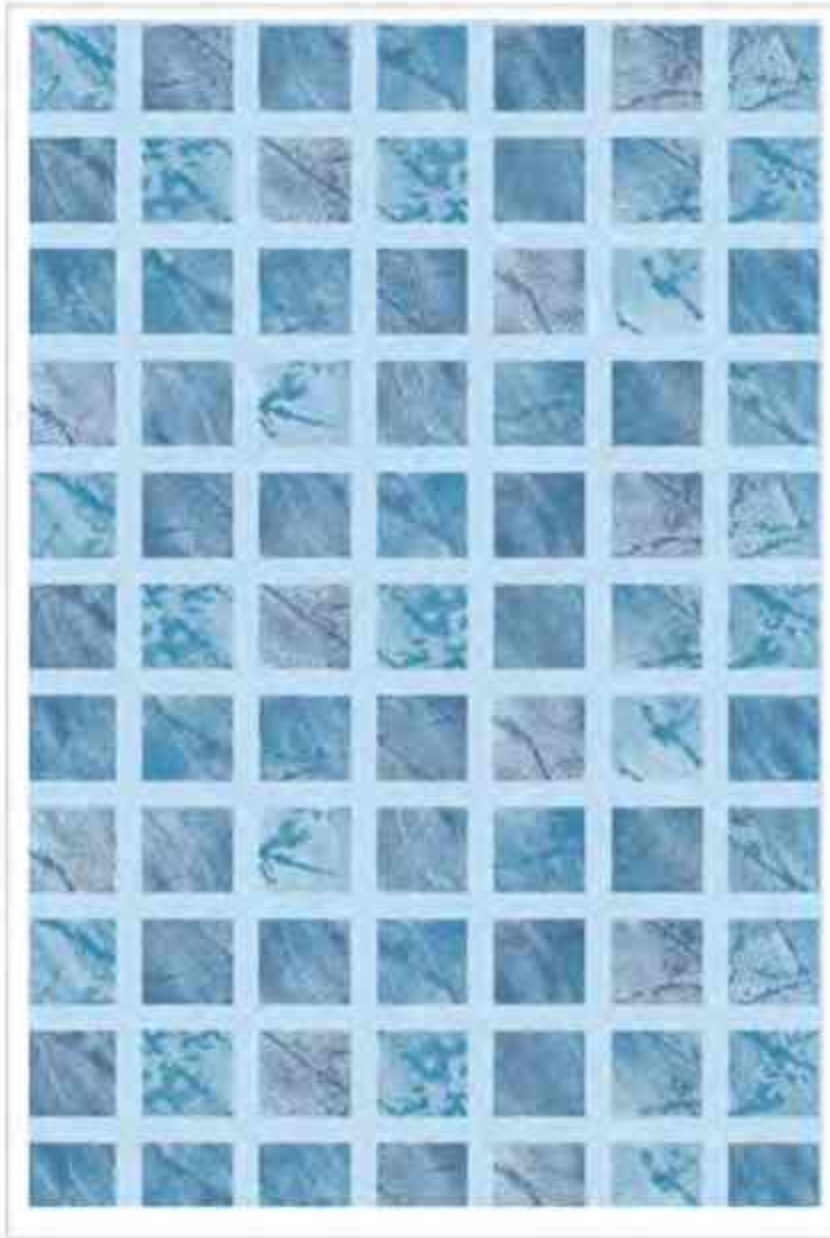

**MOSAIC – CRYSTAL**  
**SURFACE FINISH | GLOSSY**  
8X12 INCHES, 20X30 CM

**VISUAL ALSO INCLUDES:**



**ELT-GP-004 | GREY WHITE**  
**SURFACE FINISH | GLOSSY**  
RANDOM, 24X48 INCHES, 60X120 CM  
FULL BODY GLAZE PORCELAIN



Unmatched Quality Tiles







Unmatched Quality Tiles



## **Guideline for Installing Mosaic Tiles in Swimming Pool**

**Ceramic wall tiles are not recommended for use in swimming pools** owing to their relatively higher water absorption, but if you still want to use them in swimming pools then below are the parameters that should be considered when installing them.

Please note that by following this guideline, glaze-chipping, hairline cracking, and other surface defects can be minimized to some extent, but we do not guarantee complete avoidance since ceramic tile has water absorption ranging from 14% to 16%.

### **1. Do not soak the tiles in water**

### **2. Pool surface or the base of the pool should be prepared using sulphate resistant cement**

### **3. Clean & Levelled Surface**

- Before you begin installing your ceramic tiles, take the time to ensure your pool is ready to receive them. Wash down the pool walls and floor using a pressure washer to remove any dirt or pool chemicals that may be on the pool walls. This will expose the pool's surface to the mortar, which will ensure a better tile bond.

### **4. Sub-surface**

- Paint waterproofing crack isolation membranes to isolate the cracks and prevent any further in-plane cracks in the sub-base from telegraphing the tile.

### **5. Mortar & Sealant**

- Set the ceramic tiles in a latex-fortified thin-set mortar designed for prolonged use in wet areas.
- Use polymer-modified thin-set mortars like Stile Bond and mix with mortar additives rather than water like Stile Latex 73 to increase in strength and water resistance.
- Make sure to bond the tile to the substrate with complete mortar coverage.
- Apply sealant on mortar for making it waterproof.

## 6. Grout & Sealant

- Select a grout to apply to the ceramic tiles that contains no Portland cement or epoxy. Both Portland cement and epoxy can discolour or weaken in the presence of the pool chemicals.
- Use polymer grout i.e., Stile Grout as it has a lower water absorption level, and it is polymer-fortified for strength. Maintain a minimum of a 2-3mm grout joint between the tiles to allow for movement.
- Grouts will be mixed with grout additives rather than water i.e., with Stile Grout Admix.
- Sealant can be mixed in grout or apply on grout for making it waterproof.














## 7. Setting of Tiles

- Spread the mortar onto the pool walls or floor, combing it in one direction until there is a uniform depth.
- Set the tiles into the mortar at a slight angle and twist them straight into place.
- Use tile spacers if needed to maintain consistent grout joints.
- After installing tiles, tap the block with a rubber mallet to drive the tiles evenly into the mortar. Allow the mortar to cure for a minimum of 24 hours before grouting the tiles.



## TECHNICAL CHARACTERISTICS

### Wall - Ceramic Tiles, ISO 13006 Group BIII - Double Firing- Non-Rectified Tiles

S. No.		Technical Characteristics	Test Standard	Permissible Tolerance as per ISO norms	Stile Value
<b>DIMENSION AND SURFACE QUALITY</b>					
1		Dimension (Deviation in percentage from work size length and width)	ISO 10545-2	± 0.6 %	± 0.3 %
2		Thickness (Deviation in Percentage)	ISO 10545-2	± 10 %	± 3 %
3		Straightness of Sides (Maximum Deviation Percentage)	ISO 10545-2	± 0.3 %	± 0.2 %
4		Rectangularity (Maximum Deviation Percentage)	ISO 10545-2	± 0.5 %	± 0.4 %
5		Surface Flatness	ISO 10545-2	+0.5 / -0.3 %	+0.5 / -0.3 %
6		Surface Quality	ISO 10545-2	95% of tiles should be free from visible defects	Complied
<b>PHYSICAL PROPERTIES</b>					
7		Water Absorption %	ISO 10545-3	Greater than 10 %	14 % < E ≤ 16 %
8		Modulus of Rupture	ISO 10545-4	Avg, of 7 Tiles 15 N/mm <sup>2</sup>	Avg, of 7 Tiles 15 N/mm <sup>2</sup>
9		Breaking Strength	ISO 10545-4	> 600 N	> 700 N
10		Thermal Shock Resistance	ISO 10545-9	Required	Resistant
11		Crazing Resistance	ISO 10545-11	No Crazing	No Crazing
<b>CHEMICAL PROPERTIES</b>					
12		Resistance to Household Chemical	ISO 10545-13	Min. Class-B	Class-A
13		Resistance to Staining	ISO 10545-14	Min. Class-3	Class-5

It is recommended that several cartons be opened and their contents checked and assembled to see the ideal color combination. Please inspect all tiles prior to installation, company will not entertain complaints once tiles are laid/fixes.

**Disclaimer:**

*These images are merely a representation of the actual product. We do not guarantee an exact colour match of the image to the actual product. There may be a difference in colour, shade and tone of the image with the actual product.*

## Store Locations:

### Karachi:

#### Stile Emporium & Design Studio – DHA Bukhari

Plot 22-C Lane 4, Bukhari Commercial, Phase-VI DHA, Karachi.

Phone: +92-21-37249564

#### Stile Emporium & Design Studio – 26th Street

Plot No: C-8-C, 26th Street, Phase-V, DHA, Karachi.

Phone: +92-21-37228922

#### Stile Emporium & Design Studio – Star Gate

Metro Cash & Carry, Near Star Gate, Main Sharah-e-Faisal, Karachi.

Phone: +92-21-34601372-74

#### Stile Emporium – Factory Outlet

15th Milestone, National Highway, Landhi, Karachi.

Phone: +92-21-35015024-25, +92-21-38183610-11

#### Stile Emporium – Bahria Town

Build-Mate, 82-B, Midway Commercial,

Opposite Cine Gold Cinema Parking, Bahria Town, Karachi.

### Hyderabad:

#### Stile Emporium & Design Studio – Hyderabad

Shop No. 13 & 14, Fortune Arcade, Jamshoro Road, Next to KFC, Near Qasim Chowk, Hyderabad.

Phone: +92-300-0647227

### Bahawalpur:

#### Stile Emporium & Design Studio – Bahawalpur

Ground Floor, Commercial Building, Khawat No. 199/197, Moza Bandra, Multan Road, Bahawalpur.

Phone: +92-62-2720906

### Multan:

#### Stile Emporium & Design Studio – Multan

Officers Colony, Main Bosan Road, Chungi No. 9, Next to Crystal Mall, Multan.

Phone: +92-61-2078492

### Faisalabad:

#### Stile Emporium & Design Studio – Faisalabad

Talha Heights, P-243, 2-A Main Susan Road, Near Khyber Bank, Faisalabad.

Phone: +92-41-8739988

### Lahore:

#### Stile Emporium & Design Studio – DHA Lahore

164, CCA, Phase-IV, DHA, Lahore.

Phone: +92-42-37185710-12

#### Stile Emporium – Metro Thokar

Metro Cash & Carry, Thokar Niaz Baig, Multan Road, Lahore.

Phone: +92-301-8282212

### Rawalpindi:

#### Stile Emporium & Design Studio – Rawalpindi

Al Shareef Plaza, Ground Floor, Shamsabad, Main Muree Road, Rawalpindi.

Phone: +92-51-4935521-23

### Islamabad:

#### Stile Emporium – Metro Islamabad

Metro Cash & Carry, Sector I-11/4, Islamabad.

Phone: +92-51-8469524

### Wah Cantt:

#### Stile Emporium & Design Studio – Wah Cantt.

Khan Plaza, Khasra No. 434, G.T. Road, Near Raja Saab Mall, Wah Cantt.

Phone: +92-51-4926280-81

### Peshawar:

#### Stile Emporium & Design Studio – Peshawar

162/408, Tahkal Payan, University Road, Peshawar.

Phone: +92-91-3028068



For tile installation instructions, please scan the QR Code.



Scan for Catalogs

☎ 021-37188453

✉ info@stile.com.pk

🌐 www.stile.com.pk

📱 /ShabbirStile

📷 /stiletilesceramic

💻 tiledesigner.stile.com.pk